60/20 High Flow Level Master™

MODEL # 989108











OVERVIEW


The 60/20 High Flow Level Master™ is a water driven chemical proportioner that will automatically refill the 60 gallon tank with ready-to-use chemical solution. When the solution in the tank drops below a pre-set level, the float valve triggers air-activated solenoids to start the water flow. Using city water pressure (35 - 125 PSI), this venturi injection system draws and blends chemical concentrate into the 21.2 GPM @ 40 PSI water stream to create an accurately diluted solution. The system cycles continuously and a secondary fail-safe float prevents overfilling.

Key Features

- Automatically maintains a pre-set level of ready-to-use chemical solution in a 60 gallon tank
- Refills at 21.2 GPM @ 40 PSI to provide chemical for a central chemical feed system
- Dual magnetic float valve design includes a primary valve to regulate normal operation and a secondary fail-safe valve to shut off the system if the primary float valve malfunctions
- Unsinkable solid polypropylene floats suspended by rigid "push rods" ensure smooth operation and prevent the float valves from sticking in the open position
- Dilution ratio controlled with precision metering tips
- Chemical resistant wetted components ensure years of outstanding performance with minimal maintenance
- Industrial-strength design holds up in tough environments
- Available with a lower flow rate (#989106)
- See all of our Level Master™ configurations and other Lafferty chemical management systems in Catalog 9

Includes

- 60 gallon, heavy-duty, polyethylene chemical tank with drain
- 2 magnetic float valves (primary and fail-safe) with solid polypropylene floats suspended by rigid CPVC push rods
- Air inlet ball valve
- 2 stainless steel Satellite Mixing Station mounting plates
- 2 air-activated water solenoids
- 2 machined polypropylene injector bodies
- 2 sets of 20 color-coded precision metering tips

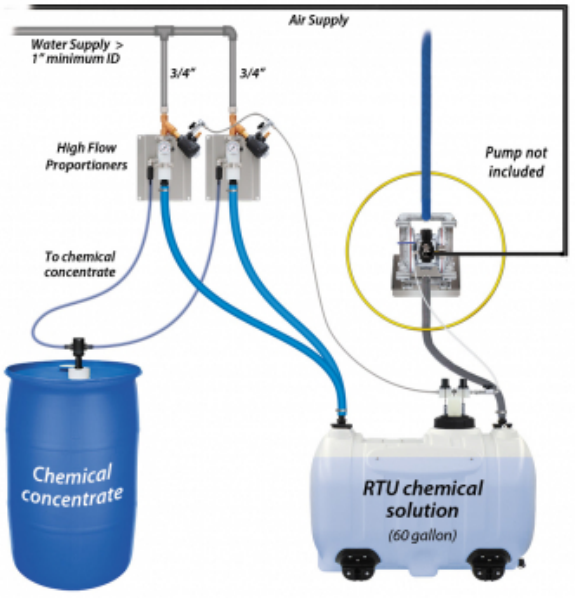

OPTIONS

For Stronger Ratios or Viscous Chemicals

1/2" Chemical Pick-up Assembly (Viton)	# 491404-A
1/2" Chemical Pick-up Assembly (EPDM)	# 491403-A

4-Way Drum & Tote Stick Lengths & Seal Materials

4-Way Drum Stick, 33" (Viton or EPDM)	# 491644 / 491644-E
4-Way Drum Stick, 48" (Viton or EPDM)	# 491649 / 491649-E
4-Way Tote Stick, 54" (Viton or EPDM)	# 491657 / 491657-E

Stainless Steel Central Pump System

1" AODD Pump (Santoprene)	# 919060SS
Teflon Upgrade	# 710943

Alternate Chemical Check Valve - Viton Standard

Check Valve, Chemical, PP(W), 1/4" (EPDM)	# 491401

REQUIREMENTS

Chemical Concentrate

Water

Temperature	up to 160°F
Pressure	35-125 PSI
Flow	21.2 GPM @ 40 PSI
Supply Line	1" Minimum
Compressed Air	Up to 80 PSI
Dilution Ratio Range	2,423:1 to 10:1 @ 40 PSI

APPLICATIONS

- Food & Beverage
- Agriculture/Horticulture
- Animal Health
- Vehicle Wash
- Hatchery
- Industrial
- Metal Processing
- Pharm/Bio
- And Many Other Applications!

Lafferty EQUIPMENT MANUFACTURING LLC
CFS TECHNOLOGIES
1.501.851.2820 | 1.800.999.2820
www.laffertyequipment.com