

7 GPM Gemini High Flow Level Master™ System

MODEL # 989072

OVERVIEW

The 7 GPM Gemini High Flow Level Master™ is a water driven chemical proportioner that will dilute and blend 2 chemicals and automatically refill a customer-supplied tank with ready-to-use chemical solution at 7 GPM @ 40 PSI. When the solution in the tank drops below a pre-set level, the float valve triggers an air-activated solenoid to start the water flow. The unique Gemini™ "double venturi" injection system combines two completely separated venturis in one injector body and uses city water pressure (35 - 125 PSI) to draw and blend 2 chemical concentrates into the water stream independently so that the chemicals never mix until they are diluted. The system cycles continuously and a secondary fail-safe float prevents overfilling.

Key Features

- Automatically maintains a pre-set level of ready-to-use chemical solution in a customer supplied tank
- The unique Gemini™ proportioner draws 2 chemical concentrates and blends them downstream after dilution
- Dilution ratios are controlled independently for each chemical using precision metering tips
- Refills at 7 GPM @ 40 PSI to provide chemical for a user-supplied central chemical feed system
- Dual magnetic float valve design includes a primary valve to regulate normal operation and a secondary fail-safe valve to shut off the system if the primary float valve malfunctions
- Unsinkable solid polypropylene floats suspended by rigid "push rods" ensure smooth operation and prevent the float valves from sticking in the open position
- Chemical resistant wetted components ensure years of outstanding performance with minimal maintenance
- Industrial-strength design holds up in tough environments
- See all of our Level Master™ configurations and other Lafferty chemical management systems in [Catalog 9](#)

Includes

- Stainless steel Level Master mounting bracket
- 2 magnetic float valves (primary and fail-safe) with solid polypropylene floats suspended by rigid CPVC push rods
- Air inlet ball valve
- Stainless steel Satellite Mixing Station mounting plate
- Air-activated water solenoid
- Machined polypropylene Gemini™ injector body
- 20 color-coded precision metering tips

OPTIONS

Stainless Steel Central Pump System


1" AODD Pump (Santoprene)	# 919060SS
Teflon Upgrade	# 710943

Drum & Tote Stick Lengths & Seal Materials

Drum Stick, 33" (Viton or EPDM)	# 491643 / 491643-E
Drum Stick, 48" (Viton or EPDM)	# 491648 / 491648-E
Drum Stick, 54" (Viton or EPDM)	# 491645 / 491645-E
Tote Stick, 33" (Viton or EPDM)	# 491653 / 491653-E
Tote Stick, 48" (Viton or EPDM)	# 491654 / 491654-E
Tote Stick, 54" (Viton or EPDM)	# 491656 / 491656-E

Alternate Check Valves - Viton Standard

Check Valve, Chemical, PP(W), 1/4" (EPDM)	# 491401
Check Valve, Viscous Chemical, PP, 1/2" HB (EPDM)	# 491403

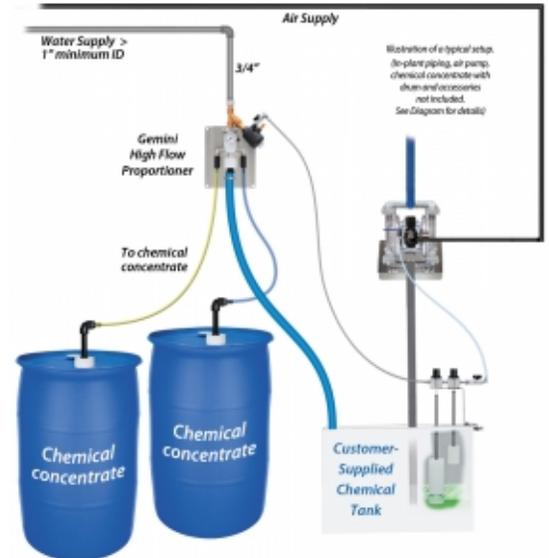

REQUIREMENTS

Chemical Concentrate

Water

Temperature	up to 160°F
Pressure	35 to 125 PSI
Flow	7 GPM @ 40 PSI
Supply Line	3/4"

Compressed Air

Up to 80 PSI

Dilution Ratio Range

1,600:1 to 9:1 @ 40 PSI

APPLICATIONS

- Food & Beverage
- Filling Scrubbers
- Agriculture/Horticulture
- Animal Health
- Vehicle Wash
- Industrial
- Pharm/Bio
- And Many Other Applications!