

# 60/10 High Flow Level Master™ System

MODEL # 989106

## OVERVIEW

The 60/10 High Flow Level Master™ is a water driven chemical proportioner that will automatically refill the 60 gallon tank with ready-to-use chemical solution. When the solution in the tank drops below a pre-set level, the float valve triggers an air-activated solenoid to start the water flow. Using city water pressure (35 - 125 PSI), this venturi injection system draws and blends chemical concentrate into the 10.6 GPM @ 40 PSI water stream to create an accurately diluted solution. The system cycles continuously and a secondary fail-safe float prevents overfilling.

## Key Features

- Automatically maintains a pre-set level of ready-to-use chemical solution in a 60 gallon tank
- Refills at 10.6 GPM @ 40 PSI to provide chemical for a central chemical feed system
- Dual magnetic float valve design includes a primary valve to regulate normal operation and a secondary fail-safe valve to shut off the system if the primary float valve malfunctions
- Unsinkable solid polypropylene floats suspended by rigid "push rods" ensure smooth operation and prevent the float valves from sticking in the open position
- Dilution ratio controlled with precision metering tips
- Chemical resistant wetted components ensure years of outstanding performance with minimal maintenance
- Industrial-strength design holds up in tough environments
- Available with a higher flow rate (#989108)
- See all of our Level Master™ configurations and other Lafferty chemical management systems in [Catalog 9](#)

## Includes

- 60 gallon, heavy-duty, polyethylene chemical tank with drain
- 2 magnetic float valves (primary and fail-safe) with solid polypropylene floats suspended by rigid CPVC push rods
- Air inlet ball valve
- Stainless steel Satellite Mixing Station mounting plate
- Air-activated water solenoid
- Machined polypropylene injector body
- 20 color-coded precision metering tips

## OPTIONS

### For Stronger Ratios or Viscous Chemicals

1/2" Chemical Pick-up Assembly (Viton)	# 491404-A
1/2" Chemical Pick-up Assembly (EPDM)	# 491403-A

### Drum & Tote Stick Lengths & Seal Materials


Drum Stick, 33" (Viton or EPDM)	# 491643 / 491643-E
Drum Stick, 48" (Viton or EPDM)	# 491648 / 491648-E
Drum Stick, 54" (Viton or EPDM)	# 491645 / 491645-E
Tote Stick, 33" (Viton or EPDM)	# 491653 / 491653-E
Tote Stick, 48" (Viton or EPDM)	# 491654 / 491654-E
Tote Stick, 54" (Viton or EPDM)	# 491656 / 491656-E

### Stainless Steel Central Pump System

1" AODD Pump (Santoprene)	# 919060SS
Teflon Upgrade	# 710943

### Alternate Chemical Check Valve - Viton Standard

Check Valve, Chemical, PP(W), 1/4" (EPDM)	# 491401
---	----------

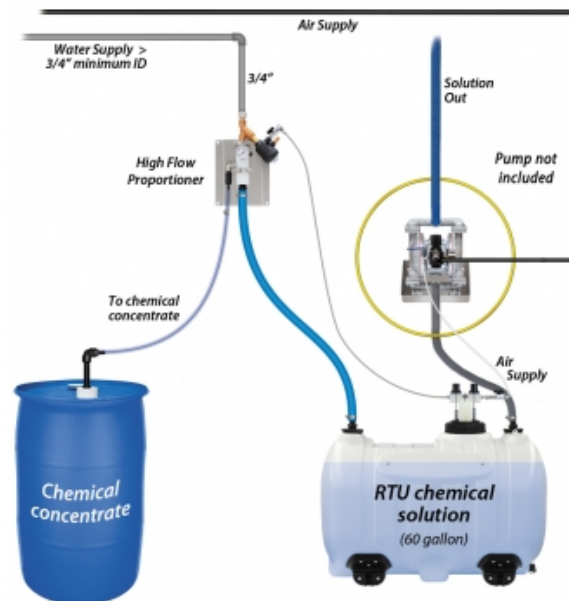

## REQUIREMENTS

### Chemical Concentrate

#### Water

Temperature	up to 160°F
Pressure	35 to 125 PSI
Flow	10.6 GPM @ 40 PSI
Supply Line	3/4"

#### Hose

1" ID x 15'

#### Compressed Air

Up to 80 PSI

### See Separate Instructions for:

Level Master™ (Single Float)	989303
------------------------------	--------

<b>Dilution Ratio Range</b>	2,423:1 to 10:1 @ 40 PSI
-----------------------------	--------------------------

## APPLICATIONS

- Food & Beverage
- Agriculture/Horticulture
- Animal Health
- Vehicle Wash
- Industrial
- Pharm/Bio
- And Many Other Applications!

**Lafferty**  
EQUIPMENT MANUFACTURING LLC  
CFS TECHNOLOGIES

1.501.851.2820 | 1.800.999.2820  
www.laffertyequipment.com