Lafferty Equipment Manufacturing, LLC
Installation & Operation Instructions

Model # 912920 · W-50SS Sanitize / A-40SS Airless Foam Hose Drop Station

REQUIREMENTS

Chemical Concentrate

Water

Temperature	up to 180°F
Pressure	125 to 350 PSI
Flow	5.6 GPM @ 250 PSI
Supply Line	3/4"

Hose

Sanitize	1/2" ID x 50'
Foam	3/8" ID x 50'

Nozzle

Sanitize	Trigger Gun, 1/2"
Foam	A-40SS Airless Foam Wand

OPTIONS

Stainless Steel Hose Racks

Large Stainless Steel Hose Rack	# 224150

Stainless Steel Jug Racks

Jug Rack, SS, 1 Gallon, Round/Square	# 224200
Jug Rack, SS, 2 1/2 Gallon	# 224210
Jug Rack, SS, 5 Gallon, Round/Square	# 224215

Safe Flow Lid™ for 1 Gallon Jugs

Lid, Suction Tube, and Strainer	# 709101

Alternate Check Valve - EPDM Standard

Check Valve, Chemical, SS, Viton, 1/4"	# 491324-V



Trigger guns and foam wand shown at smaller scale than the unit

Lafferty EQUIPMENT MANUFACTURING LLC

CFS TECHNOLOGIES

www.laffertyequipment.com
501-851-2820

WARNING! READ ALL INSTRUCTIONS BEFORE USING EQUIPMENT!

OVERVIEW

The W-50SS Sanitize / A-40SS Airless Foam Hose Drop Station is a combination system for applying one chemical as foam and another as a sanitizing spray, without compressed air. This venturi injection system uses boosted water pressure (125 - 350 PSI) to draw and blend chemical concentrates into the water streams to create accurately diluted solutions. Precision metering tips are used to control chemical usage. Foaming chemical solution flows through the foam hose and trigger gun to the "airless" foam wand which draws in atmospheric air to create and project wet, clinging foam at distances up to 10 feet. Apply sanitizer solution, or any other chemical, as a "flooding spray" using the adjustable pattern spray trigger gun.

SAFETY & OPERATIONAL PRECAUTIONS

- For proper performance do NOT modify, substitute nozzle, hose diameter or length.
- Manufacturer assumes no liability for the use or misuse of this unit.
- Wear protective clothing, gloves and eye wear when working with chemicals.
- Always direct the discharge away from people and electrical devices.
- Follow the chemical manufacturer's safe handling instructions.

TO INSTALL (REFER TO DIAGRAM ON NEXT PAGE)

1. Mount the unit to a suitable surface above the chemical supply to prevent siphoning.
2. Connect the discharge hoses as shown in the diagram and close the inlet ball valves.
3. To prevent premature blocking of the "Y" strainer flush any new plumbing of debris prior to hooking up to the station..
4. Connect water supply

Set the chemical dilution ratio by threading one of the color coded metering tips into each chemical check valve. See chemical labels for dilution ratio recommendation or consult your chemical supplier.

- For the strongest dilution ratio do NOT install a colored metering tip.
- The dilution ratios in the metering tip chart are based on water thin chemicals with a viscosity of 1CPS.
- Thicker chemicals will require a larger tip than the ratios shown in the chart.
- Application results will ultimately determine final tip color.
- Select the tip color that is closest to your desired chemical strength and thread it into the tip holder. **DO NOT OVER-TIGHTEN.**
- Push the chemical tube over the check valve barb and place the suction tube in the chemical concentrate.
- If necessary, cut suction tube(s) to length before attaching suction strainer.

TO FOAM

1. Make final metering tip adjustments based on application results.
2. Open the inlet ball valve then pull the trigger to begin application.
3. When application is completed, release the trigger, return to the unit and close the inlet ball valve.
4. Squeeze the trigger to relieve pressure in hose. Rinse the work surface before solution dries.

TO SANITIZE

1. Make final metering tip adjustments based on application results.
2. With trigger gun in hand open the inlet ball valve.
3. Pull the trigger and begin application.
4. When application is completed, release the trigger then close the inlet ball valve.
5. Briefly squeeze the trigger to relieve pressure in hose.

METERING TIP SELECTION

METERING TIP COLOR	OZ/MIN	DILUTION RATIO @ 250 PSI	
		SANITIZE	FOAM
Brown	0.56	1284:1	649:1
Clear	0.88	817:1	413:1
Bright Purple	1.38	521:1	263:1
White	2.15	334:1	169:1
Pink	2.93	245:1	124:1
Corn Yellow	3.84	187:1	95:1
Dark Green	4.88	147:1	74:1
Orange	5.77	125:1	63:1
Gray	6.01	120:1	60:1
Light Green	7.01	103:1	52:1
Med. Green	8.06	89:1	45:1
Clear Pink	9.43	76:1	39:1
Yellow Green	11.50	63:1	32:1
Burgundy	11.93	60:1	30:1
Pale Pink	13.87	52:1	26:1
Light Blue	15.14	47:1	24:1
Dark Purple	17.88	40:1	20:1
Navy Blue	25.36	28:1	14:1
Clear Aqua	28.60	25:1	—
Black	50.00	14:1	—
No Tip Ratio Up To:		7:1	13:1

The dilution ratios above are approximate values. Due to chemical viscosity, actual dilution ratios may vary.

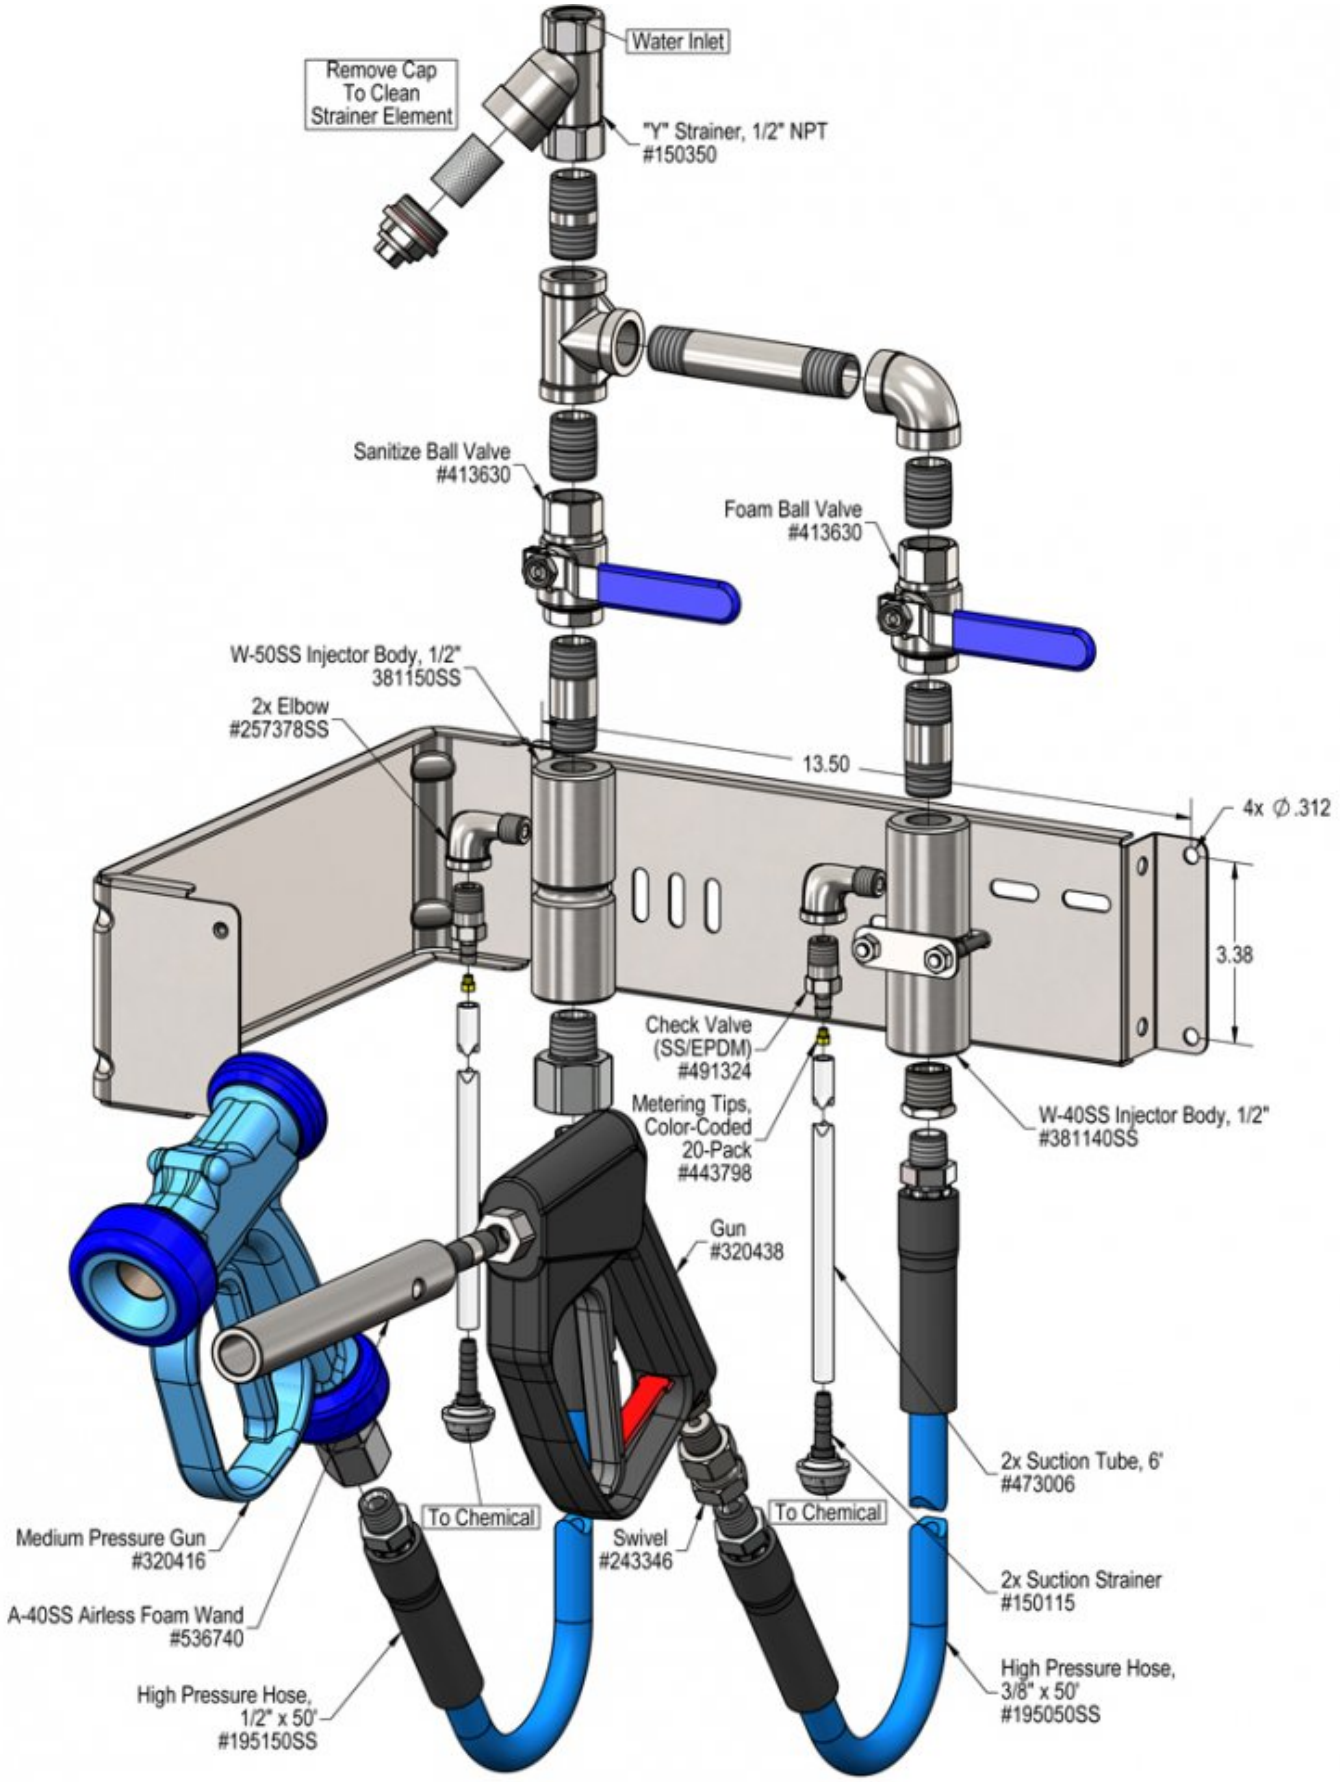
FORMULA

GPM × 128 ÷ Desired Dilution Ratio = oz/min

- *See Unit Flow Rates chart for GPM*
- *Use 20 for 20:1 dilution ratio, 30 for 30:1, etc.*
- *Match calculated ounces per minute (oz/min) to nearest oz/min in Metering Tip Selection chart.*

UNIT FLOW RATES

PSI	GPM	
	SANITIZE	FOAM
125	3.97	2.01
150	4.35	2.20
200	5.02	2.54
250	5.62	2.84
300	6.15	3.11
350	6.64	3.36


Water Inlet
Remove Cap To Clean Strainer Element
"Y" Strainer, 1/2" NPT #150350
Sanitize Ball Valve #413630
Foam Ball Valve #413630
W-50SS Injector Body, 1/2" 381150SS
2x Elbow #257378SS
13.50
4x ∅.312
3.38
Check Valve (SS/EPDM) #491324
Metering Tips, Color-Coded 20-Pack #443798
W-40SS Injector Body, 1/2" #381140SS
Gun #320438
2x Suction Tube, 6' #473006
To Chemical
To Chemical
Swivel #243346
Medium Pressure Gun #320416
A-40SS Airless Foam Wand #536740
2x Suction Strainer #150115
High Pressure Hose, 3/8" x 50' #195050SS
High Pressure Hose, 1/2" x 50' #195150SS

Troubleshooting Guide

Problem	Possible Cause / Solution	
	Startup	Maintenance
A) Foamer will not draw chemical. B) Foam does not clean / perform. C) Water back flowing into chemical container	1, 2, 4, 5 1, 2, 6, 7 9	9, 10, 11, 12, 13, 14, 15

Problem	Possible Cause / Solution	
	Startup	Maintenance
A) Sanitizer will not draw chemical. B) Using too much chemical. C) Water back flowing into chemical	1, 2, 3, 4, 5, 8 9	9, 10, 12, 13, 14, 15

Possible Cause / Solution

Startup

1. **Water pressure too low**
   - Increase water pressure. (See Requirements)
2. **Inlet ball valve not completely open**
   - Completely open the valve.
3. **Nozzle wrong size, too small**
   - See requirements.
4. **Discharge too long, wrong size or kinked**
   - Straighten hose, see requirements.
5. **Chemical tube not immersed in chemical or chemical depleted**
   - Immerse or replenish chemical
6. **Dilution too weak**
   - Install larger metering tip.
7. **Improper chemical**
   - Ensure product is recommended for foaming and/or the application.
8. **Dilution too strong even with smallest metering tip**
   - Some weak dilutions at lower water pressures are impossible to achieve with a single metering tip. Pre-dilute your chemical until desired dilution ratio is achieved. Or order 491307-1/4" Inline Dual Metering Tip Holder.

Maintenance

9. **Chemical check valve stuck or clogged**
   - Clean or replace.
10. **Water "Y" strainer screen clogged**
    - Clean screen or replace.
11. **Airless Foam Wand screen blocked**
    - Dried chemical build-up may be obstructing flow through the screen. Remove fittings and soak the entire wand in de-scaling acid.
12. **Metering tip blocked**
    - Clean or replace metering tip.
13. **Chemical tube stretched out where tube slides over check valve or pin hole/cut in chemical tube (sucking air in)**
    - Cut off end of tube or replace tube.
14. **Vacuum leak in chemical pick-up connection**
    - Tighten the connection.
15. **Chemical build-up or scale may have formed in the body causing poor or no chemical pick-up**
    - Remove fittings and soak entire body in de-scaling acid. Replace fittings being careful not to cross thread or over tighten.

PREVENTIVE MAINTENANCE: When the unit will be out of service for extended periods, place chemical tube(s) in water and flush the chemical out of the unit to help prevent chemical from drying out and causing build-up. Periodically check and clean chemical strainer and replace if missing.