Lafferty Equipment Manufacturing, LLC
Installation & Operation Instructions

Model # 919010 · City Pressure Rinse Station

REQUIREMENTS

Water	
Temperature	up to 180°F
Pressure	35 to 125 PSI
Flow	7.2 GPM @ 40 PSI
Supply Line	3/4"
Hose	3/4" ID x 50'
Nozzle	4 Hole Rinse Nozzle

OPTIONS

Stainless Steel Hose Racks	
Large Stainless Steel Hose Rack	# 224150

WEIGHT & DIMENSIONS

Single Package	
Shipping Weight	25 lbs.
Shipping Dimensions	28" x 19" x 8"



Lafferty EQUIPMENT MANUFACTURING LLC

CFS TECHNOLOGIES

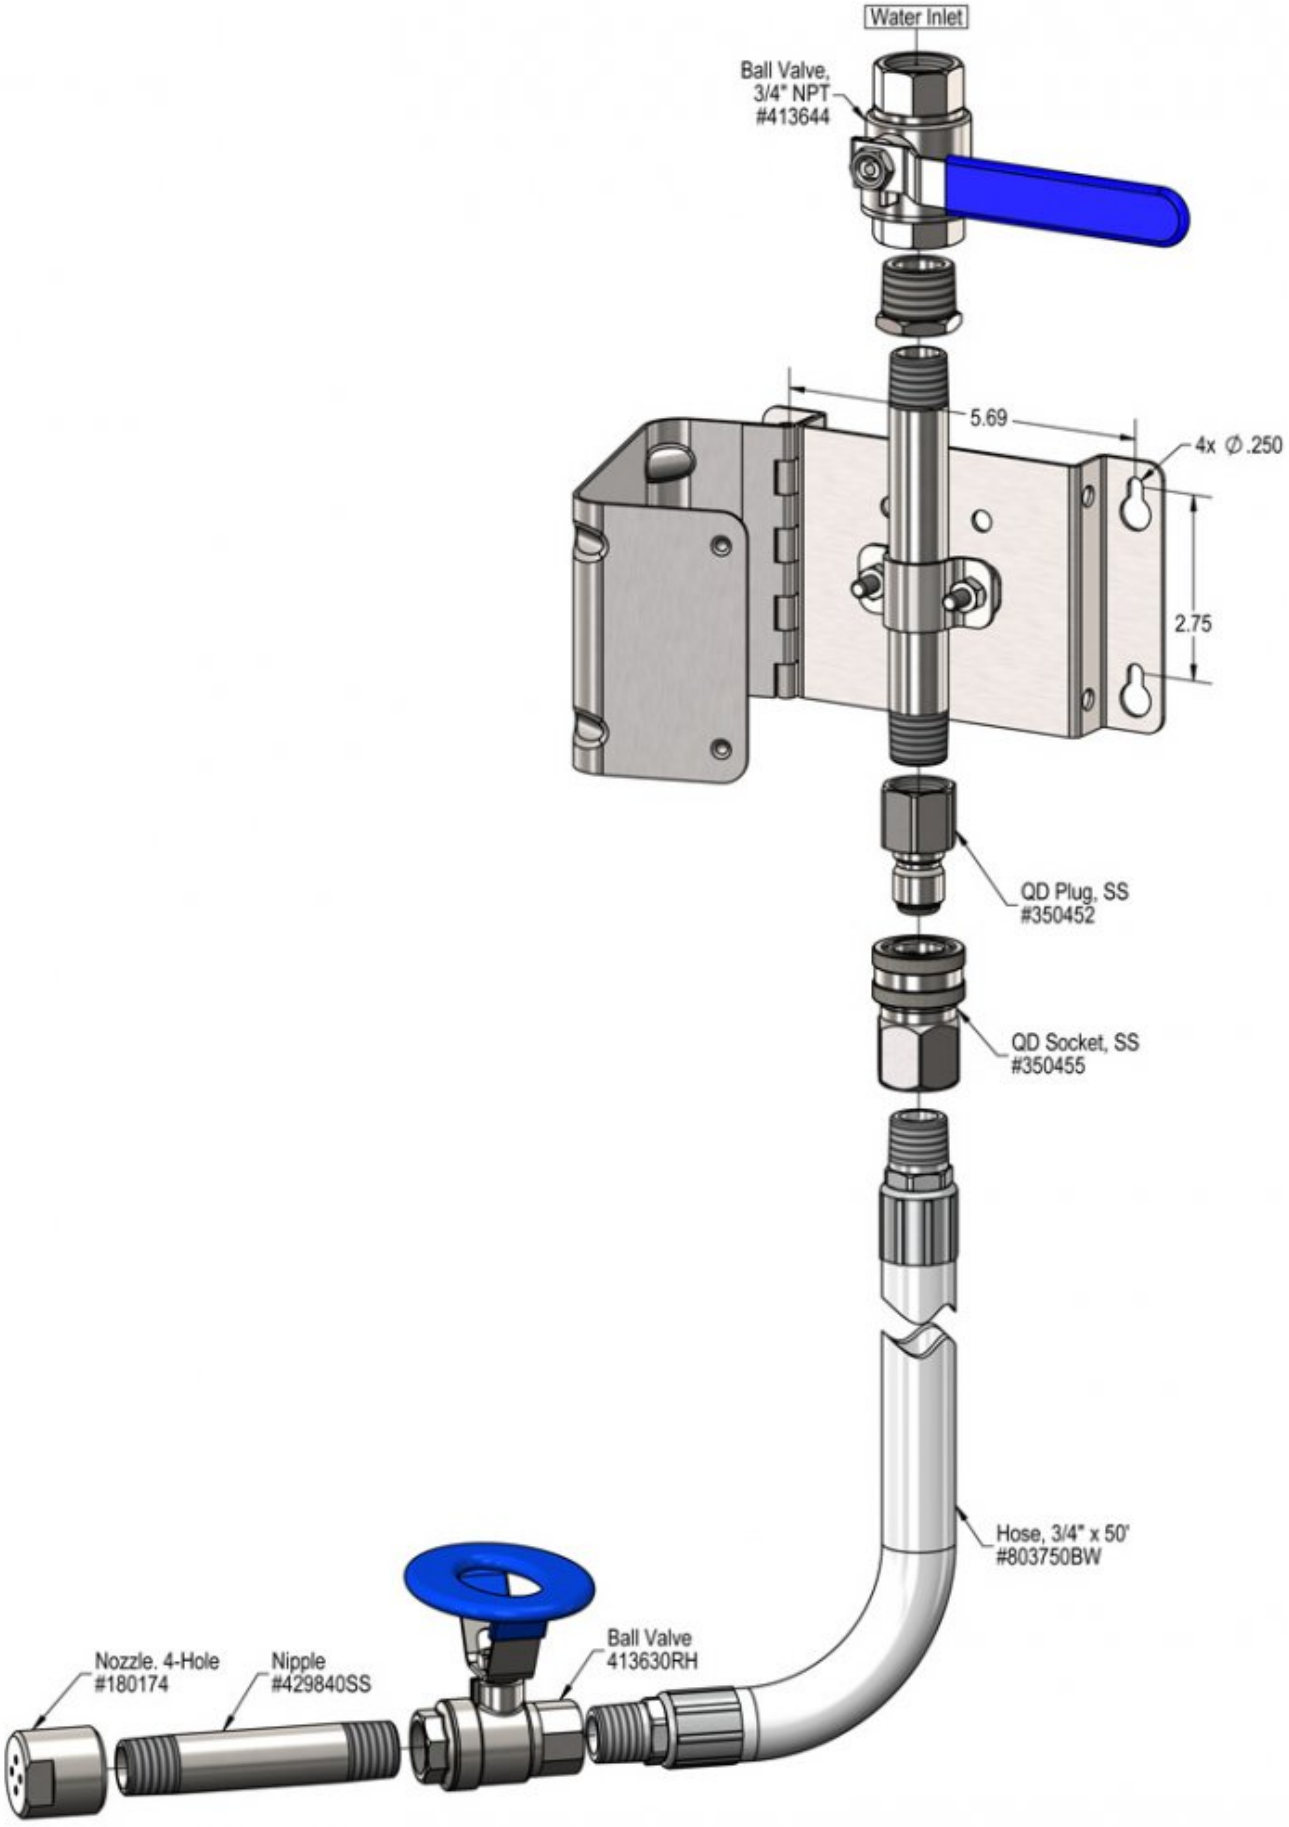
www.laffertyequipment.com
501-851-2820

WARNING! READ ALL INSTRUCTIONS BEFORE USING EQUIPMENT!

OVERVIEW

The City Pressure Rinse Station is designed for both pre-clean and post-clean rinsing of a variety of surfaces in and around food and beverage plants that utilize city water pressure. Constructed with stainless steel components, this Rinse Station connects to 35-125 PSI water and projects it through the unique and powerful 4 hole nozzle.

UNIT FLOW RATES	
PSI	**GPM**
35	6.73
40	7.20
50	8.05
60	8.82
70	9.52
80	10.18
90	10.80
100	11.38
110	11.94
120	12.47
125	12.73


Water Inlet
Ball Valve,
3/4" NPT
#413644
5.69
4x ∅.250
2.75
QD Plug, SS
#350452
QD Socket, SS
#350455
Hose, 3/4" x 50'
#803750BW
Ball Valve
413630RH
Nozzle, 4-Hole
#180174
Nipple
#429840SS

This page intentionally left blank.