

RADAR™ AP-MM Foam System

MODEL # 977930

OVERVIEW

The RADAR™ AP-MM Foam System is an electric eye activated foam applicator that mounts to a user-supplied drive-through arch for applying asphalt release chemicals to truck beds. It is designed for facilities with low or fluctuating water pressure. This system uses compressed air to drive a rugged Sandpiper air-operated, double-diaphragm pump which draws chemical concentrate and water from separate static tanks and blends them "on-the-fly" to create an accurately diluted solution. Rich, clinging foam is created by injecting compressed air into the solution to greatly expand volume and coverage ability. When a truck breaks the electric eye's line-of-sight, a delay timer allows the driver to position the truck under the foam bar before foaming begins and a run timer applies release agent for a pre-set time or until the vehicle leaves the foaming area, whichever is first.

Key Features

- Projects asphalt release chemicals on to truck beds from a foam bar that attaches to an existing drive-through bar
- Rich, clinging foam increases chemical contact time and coverage for maximum effectiveness
- The rugged Sandpiper AODD pump draws chemical concentrate and water from separate static tanks and blends them "on-the-fly"
- The system delays for an adjustable length of time when a truck breaks the beam of the electric eye, allowing the driver to position the truck, before activating for an adjustable, pre-set length of time
- The driver remains in his cab and avoids the risk of slip-and-fall injury and chemical waste
- Evenly coats the truck bed in just seconds, reducing run-off and chemical waste
- Foaming will stop if the driver leaves the area early
- A float valve assembly attaches to, and automatically refills, a user-supplied static water tank
- Achieves a range of dilution ratios using a metering manifold to control chemical and water flow
- Chemical resistant wetted components ensure years of outstanding performance with minimal maintenance
- Available as a spray applicator (#977841)
- See other Lafferty asphalt release equipment and industrial chemical applicators in [Catalog 8](#)

Includes

- Lockable, stainless steel pump enclosure
- Control box with delay/run timers & electric eye set
- 1/2" Sandpiper AODD Pump (Santoprene diaphragms)
- Machined polypropylene metering manifold
- Machined polypropylene foamer body
- Water tank float valve assembly
- 40' discharge hose and PVC foam bar with 4 fan nozzles


OPTIONS

Heater Assembly

Retro-Fit Heater Assembly # 720981

Drum & Tote Stick Lengths & Seal Materials

| | |
|---------------------------------|---------------------|
| Drum Stick, 33" (Viton or EPDM) | # 491643 / 491643-E |
| Drum Stick, 48" (Viton or EPDM) | # 491648 / 491648-E |
| Drum Stick, 54" (Viton or EPDM) | # 491645 / 491645-E |
| Tote Stick, 33" (Viton or EPDM) | # 491653 / 491653-E |
| Tote Stick, 48" (Viton or EPDM) | # 491654 / 491654-E |
| Tote Stick, 54" (Viton or EPDM) | # 491656 / 491656-E |

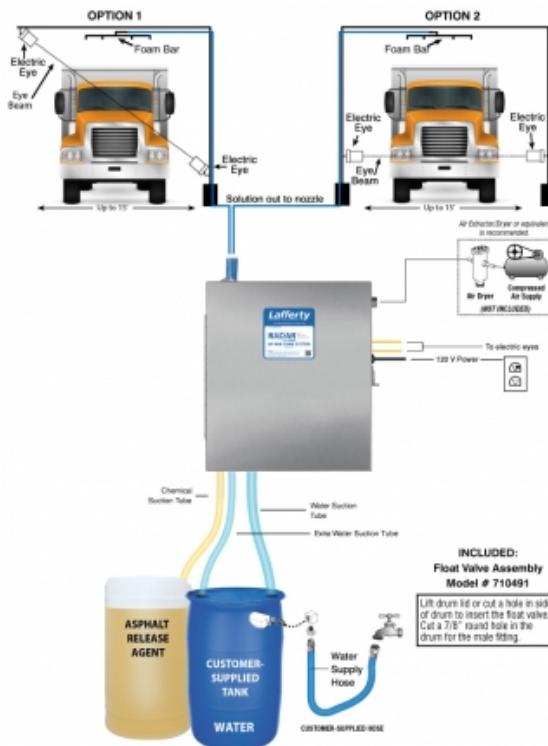

RADAR™ RAPID
DRIVE THRU
ASPHALT RELEASE

REQUIREMENTS

Chemical Concentrate

Static Tank of Water

| | |
|-------------------------|-------------------|
| Compressed Air | up to 16 CFM |
| Minimum Air Supply Line | 1/2" |
| Hose | 1" ID x 40' |
| Nozzle | Foam Bar Assembly |
| Electric | 120V |

Lafferty
EQUIPMENT MANUFACTURING LLC
CFS TECHNOLOGIES

1.501.851.2820 | 1.800.999.2820
www.laffertyequipment.com